



Didactic lift



The ASC89 lift is a model which may be connected to a PLC or some microprocessors.

It comprises 24 outputs and 21 inputs.

You can only use a part of input/outputs if you want to do easy programmes

MAIN FEATURES :

- Opening and closing of the doors on each floor is done by electric servo motors.
- The rear of the lift is visible through the sides and the bottom which are transparent
- The route of the lift is sensed at each floor by a photo-detectors.
- Two limit switches, high & low, (without program control) stop the lift if there is an error in the program.
- All of the buttons and switches are fitted with de-bounce circuits.
- The outputs are protected against the possibility of a short-circuit.
- The rear sliding door is of a transparent Plexiglass design and there is no manual access possible, as there is risk of damaging the servomotor.
- The mechanical controls are sturdy and can withstand any likely faults.

ref. ASC89-24 LOGIC ON 24V

ref. ASC89-05 LOGIC ON 5V

4 LEVELS EACH LEVEL HAS

- 1 electrically opening door - 1 photo-detector for 'door closed' - 1 photo-detector for 'door-open'
- 2 safety limit switches for door open/close (No control from the program possible)
- 1 button to call the lift 'up' (except the 3rd floor) with indicator lamp.
- 1 button to call the lift 'down' (except the ground floor) with indicator lamp
- 1 lamp to indicate the presence of the lift - 1 photodetector to indicate the presence of the lift


CONTROLS INSIDE THE LIFT

- 4 buttons for each floor - 1 stop button
- 1 switch to simulate a blocked door
- 4 lights for each floor - 1 light inside the lift (simulating the lighting)

UNIT SUPPLIES POWER TO the motors - the LED - internal logic to the unit.

OTHERS SPECIFICATIONS Dims 780 x 480 x 440mm Weight 15kg Supply 220V
The unit is available in two driving logic values, 24V or 5V.

OPTION INTERFACE FOR DIDACTIC LIFT

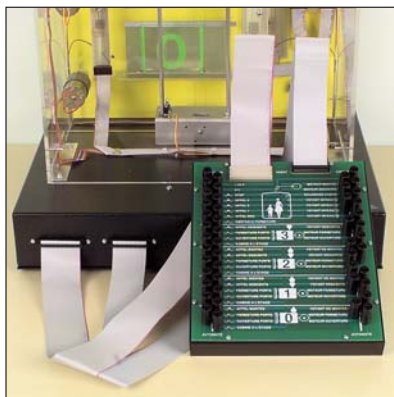


ASMAT is an interface allowing a quick connection to the ASC89 lift from a PLC. To help in quickly identifying the functions of the connectors, small symbol and piece of text next to each connector, allowing immediate understanding of its function. The operating sense: Lift - PLC or PLC - Lift. It is clearly indicated by vertical arrows. Metal box: 22x272x32mm. Weight: 250g.

CONNECTION	CONNECTION
ASMAT - LIFT	ASMAT - PLC
Two flat cables are fitted. One connector for the inputs and the other for the outputs.	The front face of the board has two columns of 4mm plugs, which are used to connect to the PLC with normal leads. The plugs on the left are for the inputs to the PLC, on the right for the outputs.

ref. ASMAT

OPTION PLC FOR DIDACTIC LIFT

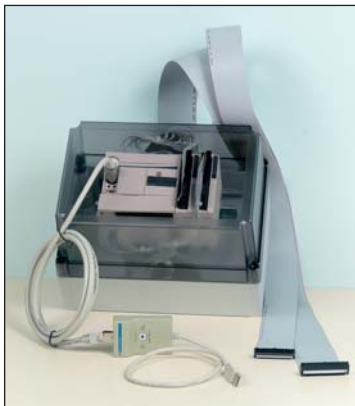

AUTOMASC is delivered in a plastic box including:

- a 30 inputs / 26 outputs PLC (dry contacts)
- an interface for the lift
- supplies for the PLC outputs
- All cables to the lift, mains cord.

AUTOMASC is connected to the lift rear connectors with 2 flat cables, one for inputs, the other one for outputs.

PROGRAMMING

User can program AUTOMASC with 2 languages:
Instructions list or contact language. You can program it from PC, using the Télémécanique® TWIDO suite software (included)

OTHER FEATURES

The front panel is transparent to see many LED, showing the PLC state. AUTOMASC is supplied with a demo program, which can be modified or completed. The technical leaflet indicates the corresponding between the lift inputs and outputs and the ones of the PLC, allowing the development of a complete program.

Mains: 220/240V - 50Hz - 50VA
Dimensions: 350 x 190 x 170 mm
Weight: 2.7kg

ref. AUTOMASC